

# DUAL FUNCTION SERIES

This series of vents offers certified flood venting protection with superior automatic natural ventilation control. Ideal for crawlspace applications and other areas requiring flood venting protection as well as natural air ventilation.

## VENTILATION

A bimetal coil automatically opens and closes the ventilation louvers as temperature changes from 35° F to 75° F.

No electricity is required.

In the event of a flood, the internal floats lift to release the flood door to rotate open and relieve the hydrostatic pressure regardless of the louvers' position, open or closed.


**1 Smart Vent**  
1540-510

**2 Stacker**  
1540-511

Stacker Models are twice as efficient as a single unit and are a great solution for large amounts of square footage, and in situations where there is not enough wall space to fit in the necessary or required single units.

**2**

*Pictured in powder coat white*

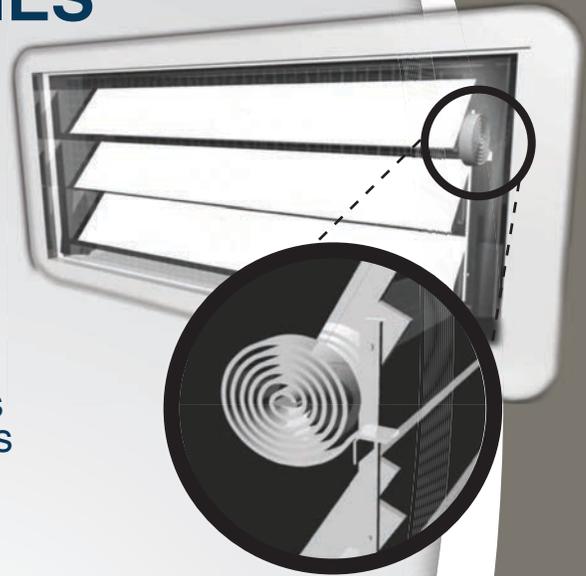

**1**

*Pictured in custom powder coat black*



**For more information on Flood Protection Solutions, contact:**

Smart Vent 430 Andbro Drive, Unit 1 • Pitman, NJ 08071  
Website: [www.smartvent.com](http://www.smartvent.com) Tel: (877) 441-8368 Email: [info@smartvent.com](mailto:info@smartvent.com)



STANDARD FINISH POWDER COAT WHITE  
POWDER COAT PAINT OPTIONS:



Custom colors also available.



MODEL NUMBER	FLOOD COVERAGE	AIR VENTILATION	VENT SIZE	ROUGH OPENING
1540-510	200 sq. ft.	51 sq. in.	16" W x 8"H x 3"D	16 <sup>1</sup> / <sub>4</sub> in x 8 <sup>1</sup> / <sub>4</sub> in
1540-511	400 sq. ft.	102 sq. in.	16" W x 16"H x 3"D	16 <sup>1</sup> / <sub>4</sub> in x 16 <sup>3</sup> / <sub>8</sub> in



To view other sizing options see Multi-frames

**For more information on Flood Protection Solutions, contact:**

Smart Vent 430 Andbro Drive, Unit 1 • Pitman, NJ 08071  
Website: [www.smartvent.com](http://www.smartvent.com) Tel: (877) 441-8368 Email: [info@smartvent.com](mailto:info@smartvent.com)